



Saphir

Semelle • Cylindro-conique
de 3,5 à 10 m hors sol




CE

Entraxe 200

Entraxe 300

Poids max = 40 kg ◀ Charge verticale en top ▶ Poids max = 60 kg

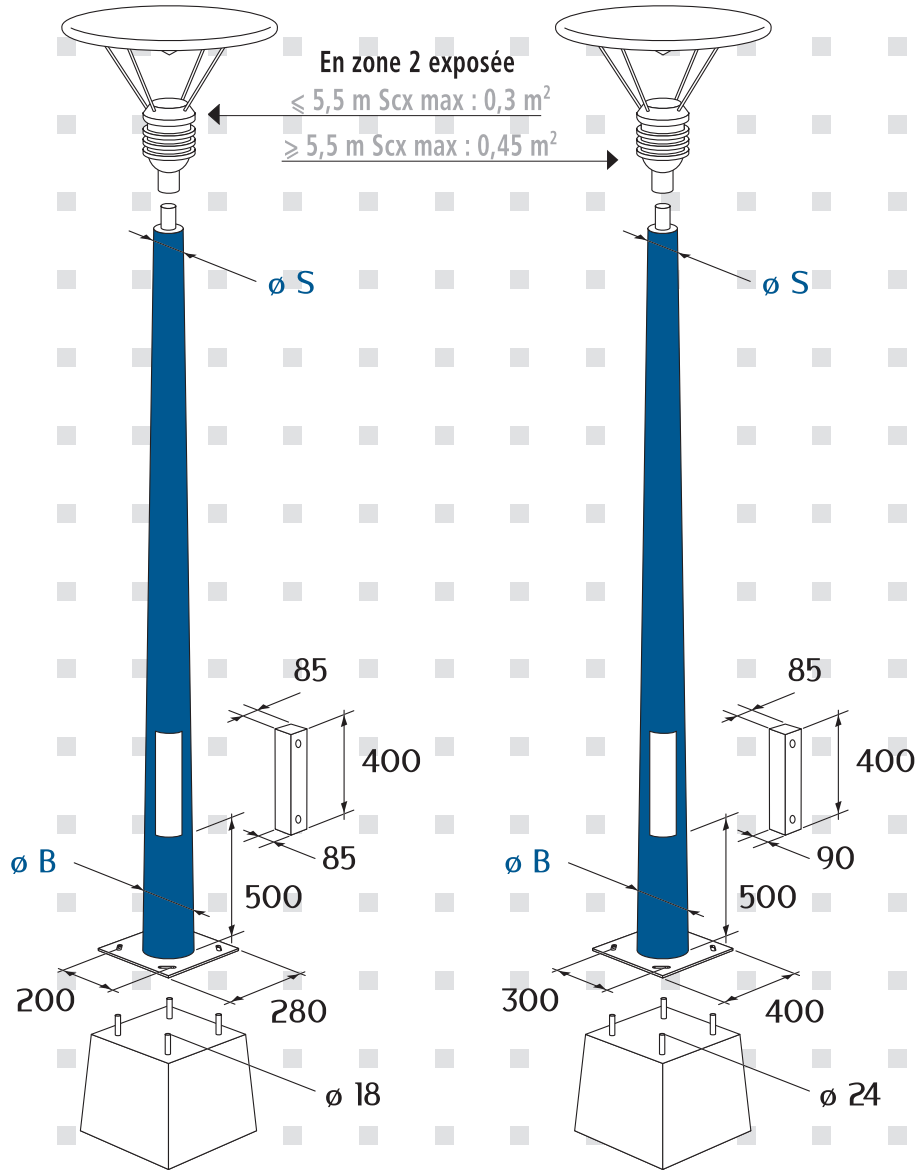


Entraxe 200

Mât	Hauteur (m)	3,5	4	4,5	5	5,5
	ø S (mm)	140	132	125	118	110
	ø B (mm)	193	193	193	193	193
	Poids (kg)	192	209	225	236	251
	C. gravité (m/pied)	1,52	1,71	1,89	2,04	2,21

Entraxe 300

Mât	Hauteur (m)	6	6,5	7	8	9	10
	ø S (mm)	118	110	120	110	110	110
	ø B (mm)	208	208	225	230	245	260
	Poids (kg)	314	333	405	448	536	628
	C. gravité (m/pied)	2,41	2,57	2,80	3,09	3,43	3,77

Poids/avancée

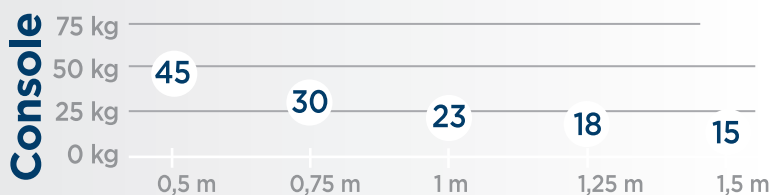

Aucune console "en top" sur ø 110 : fixation sur fût.